

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** HOFTRONIC

**Supplier's address:** HOF Trading Support, Fahrenheitstraat 11, 6003 DC Weert Limburg, NL

**Model identifier:** 2727130

## Type of light source:

|                                                     |                  |                                 |                            |
|-----------------------------------------------------|------------------|---------------------------------|----------------------------|
| Lighting technology used:                           | LED              | Non-directional or directional: | DLS                        |
| Light source cap-type (or other electric interface) | Integrated LED's |                                 |                            |
| Mains or non-mains:                                 | MLS              | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No               | Envelope:                       | -                          |
| High luminance light source:                        | No               |                                 |                            |
| Anti-glare shield:                                  | No               | Dimmable:                       | Only with specific dimmers |


## Product parameters

| Parameter                                                                                                                                             | Value                      | Parameter                                                                                                                                                  | Value                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| General product parameters:                                                                                                                           |                            |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 320                        | Energy efficiency class                                                                                                                                    | E                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 34 650 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 312,0                      | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                          | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height                     | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width                      |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth                      |                                                                                                                                                            |                        |

|                                                                                                                         |        |                                                                    |                |  |
|-------------------------------------------------------------------------------------------------------------------------|--------|--------------------------------------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre)                                                   |        |                                                                    |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -      | If yes, equivalent power (W)                                       | -              |  |
|                                                                                                                         |        | Chromaticity coordinates (x and y)                                 | 0,380<br>0,380 |  |
| <b>Parameters for directional light sources:</b>                                                                        |        |                                                                    |                |  |
| Peak luminous intensity (cd)                                                                                            | 11 017 | Beam angle in degrees, or the range of beam angles that can be set | 120            |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |        |                                                                    |                |  |
| R9 colour rendering index value                                                                                         | 0      | Survival factor                                                    | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,96   |                                                                    |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |        |                                                                    |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90   | Colour consistency in McAdam ellipses                              | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b)   | If yes then replacement claim (W)                                  | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 0,9    | Stroboscopic effect metric (SVM)                                   | -              |  |

(a) '-': not applicable;

(b) '-': not applicable;

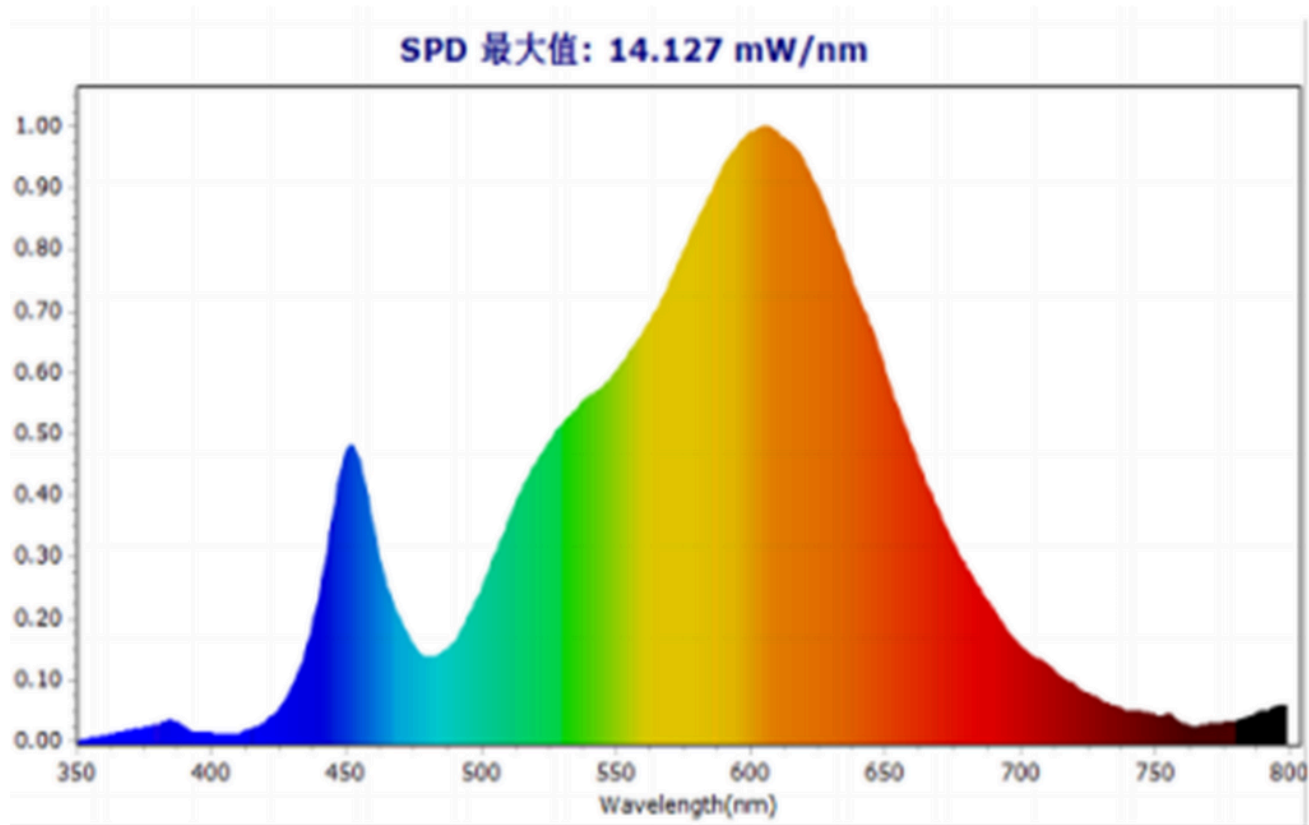

Model placed on the Union market from 14/11/2025.



**EPREL registration number:** 2421708

<https://eprel.ec.europa.eu/qr/2421708>

**Supplier:** HOF Trading B.V. (Manufacturer)

**Website:**

**Customer care service:**

**Name:** HOF Trading Support

**Website:** [www.hoftronic.com](http://www.hoftronic.com)

**Email:** [info@hoftrading.com](mailto:info@hoftrading.com)

**Phone:** +31 (0)85 401 0382

**Address:**

Fahrenheitstraat 11  
6003 DC Weert  
Netherlands