Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: HOFTRONIC

Supplier's address: HOF Trading Support, Fahrenheitstraat 11, 6003 DC Weert Limburg, NL

Model identifier: 4400361

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LEDs		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes
Product parameters			
Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	570 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height: 41 Width: 98 Depth: 85	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,463 0,420
Parameters for directional light sources:				
Peak luminous intensity (cd)		930	Beam angle in degrees, or the range of beam angles that can be set	50
Parameters for LED and OLED light sources:				
R9 colour rendering index value		8	Survival factor	1,00
the lumen maintenance factor		0,97		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,2

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

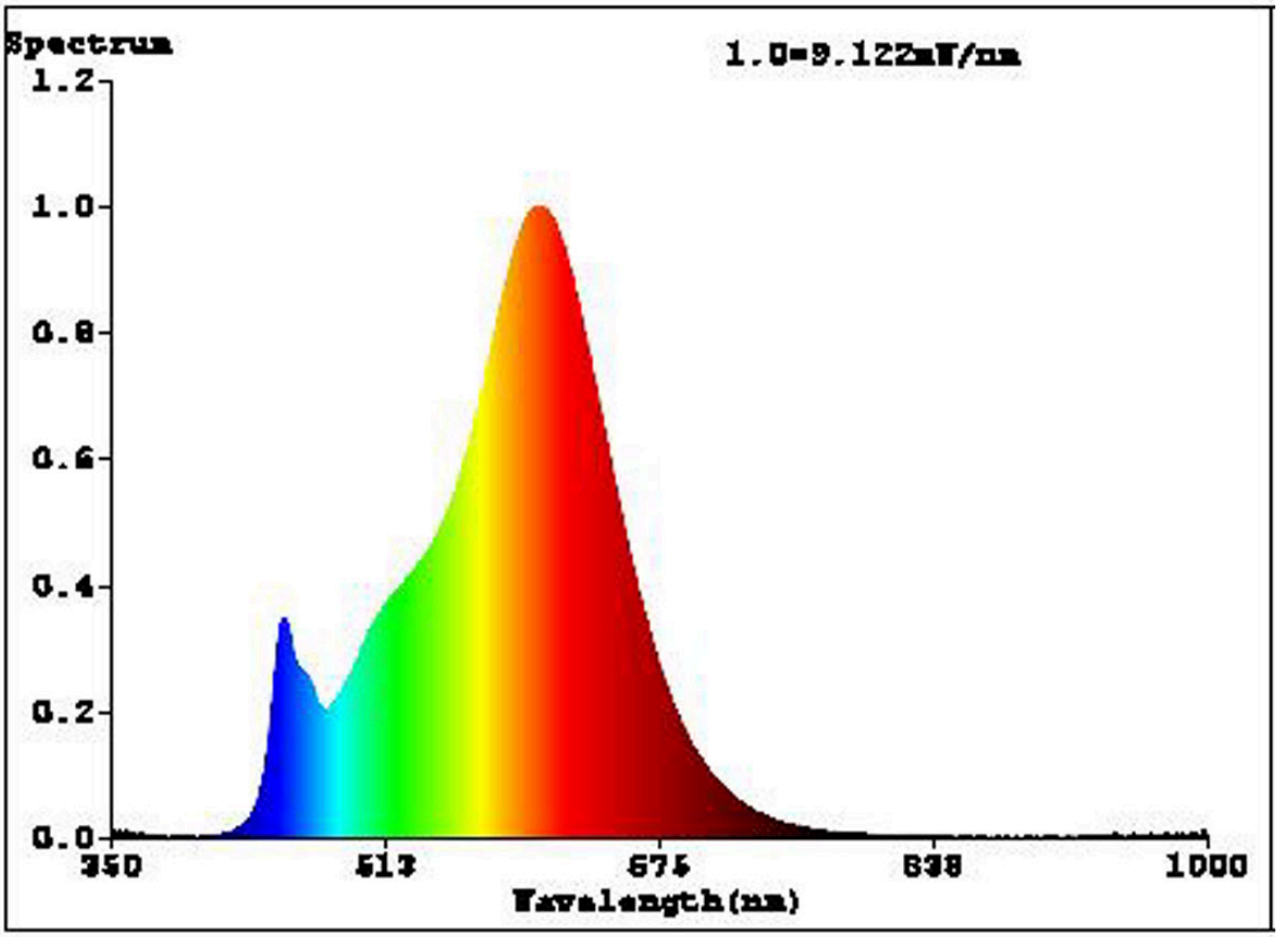
Spectrum
1.0=9.122mW/nm
1.2
1.0
0.8
0.6
0.4
0.2
0.0
350
513
675
838
1000
Wavelength(nm)

Model placed on the Union market from 21/10/2019

EPREL registration number: 729019

https://eprel.ec.europa.eu/qr/729019

Supplier: HOF Trading B.V. (Manufacturer)

Website:

Customer care service:

Name: HOF Trading Support

Website: www.hoftronic.com

Email: info@hoftrading.com

Phone: +31 (0)85 401 0382

Address:
Fahrenheitstraat 11
6003 DC Weert
Netherlands