

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** HOFTRONIC

**Supplier's address:** HOF Trading Support, Fahrenheitstraat 11, 6003 DC Weert Limburg, NL

**Model identifier:** 2718541

## Type of light source:

|                                                     |                 |                                 |     |
|-----------------------------------------------------|-----------------|---------------------------------|-----|
| Lighting technology used:                           | LED             | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated LEDs |                                 |     |
| Mains or non-mains:                                 | MLS             | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No              | Envelope:                       | -   |
| High luminance light source:                        | No              |                                 |     |
| Anti-glare shield:                                  | No              | Dimmable:                       | No  |


## Product parameters

| Parameter                                                                                                                                      | Value                  | Parameter                                                                                                                                                  | Value                  |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <b>General product parameters:</b>                                                                                                             |                        |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 36                     | Energy efficiency class                                                                                                                                    | D                      |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 4 860 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000                  |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 36,0                   | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,00                   |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, lighting control                                                                               | Height                 | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                | Width                  |                                                                                                                                                            |                        |
|                                                                                                                                                | Depth                  |                                                                                                                                                            |                        |

|                                                                                                                         |      |                                                                    |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------------------------------------|----------------|--|
| parts and non-lighting control parts, if any (millimetre)                                                               |      |                                                                    |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)                                       | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)                                 | 0,380<br>0,380 |  |
| <b>Parameters for directional light sources:</b>                                                                        |      |                                                                    |                |  |
| Peak luminous intensity (cd)                                                                                            | 386  | Beam angle in degrees, or the range of beam angles that can be set | 120            |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                                                    |                |  |
| R9 colour rendering index value                                                                                         | 0    | Survival factor                                                    | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,96 |                                                                    |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                                                    |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90 | Colour consistency in McAdam ellipses                              | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)                                  | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 0,1  | Stroboscopic effect metric (SVM)                                   | 0,0            |  |


(a) '-': not applicable;

(b) '-': not applicable;

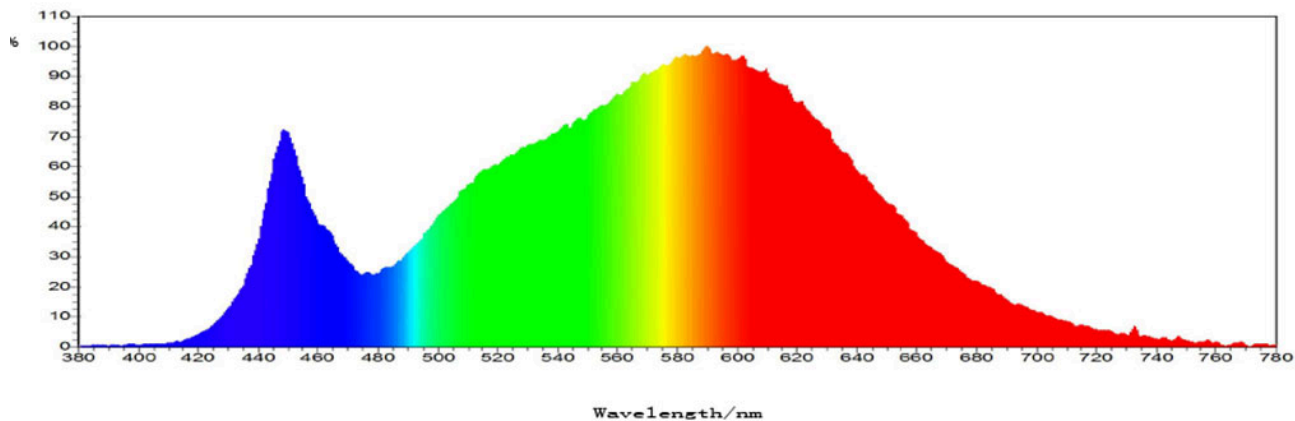

## Spectrum Parameters

$x$ : 0.3762       $y$ : 0.3789  
 $u$ : 0.2275       $v$ : 0.3437  
 WD: 577.6 nm      WP: 590.0 nm  
 HW: 143.0 nm      Purity: 0.410  
 CCT: 4112 K      Ra: 81.9  
 SDCM: 3.29      DUV: 0.0023  
 色比: R%: 34.6      G%: 48.0      B%: 17.4  
 K<sub>red</sub> 21.74%      K<sub>green</sub> 74.21%      K<sub>blue</sub> 4.04%  
 R1: 76.3      R2: 86.2      R3: 95.7  
 R4: 76.4      R5: 74.4      R6: 80.2  
 R7: 86.3      R8: 58.5      R9: 2.7  
 R10: 67.7      R11: 76.4      R12: 54.9  
 R13: 78.2      R14: 97.5      R15: 68.0

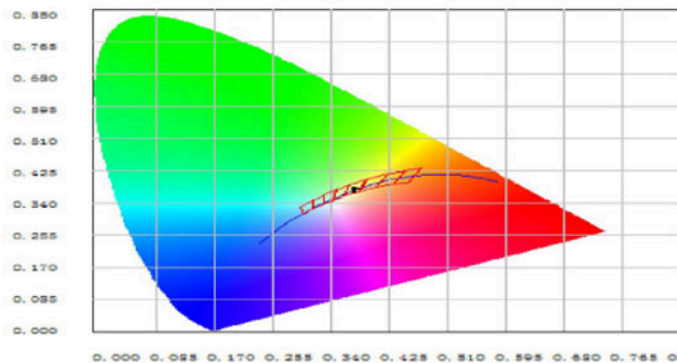


## Electrical parameters

Flux: 4725.904 lm      P: 130.911 lm/w      P: 16.78 mw  
 I: 171.0 mA      V: 220 V      P: 36.100 w      PF:

Memo:

Model placed on the Union market from 02/12/2024



**EPREL registration number:** 2211143

<https://eprel.ec.europa.eu/qr/2211143>

**Supplier:** HOF Trading B.V. (Manufacturer)

**Website:**

**Customer care service:**

**Name:** HOF Trading Support

**Website:** [www.hoftronic.com](http://www.hoftronic.com)

**Email:** [info@hoftrading.com](mailto:info@hoftrading.com)

**Phone:** +31 (0)85 401 0382

**Address:**

Fahrenheitstraat 11  
6003 DC Weert  
Netherlands