

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** HOFTRONIC

**Supplier's address:** HOF Trading Support, Fahrenheitstraat 11, 6003 DC Weert Limburg, NL

**Model identifier:** 2738372-amz

## Type of light source:

|                                                     |                  |                                 |      |
|-----------------------------------------------------|------------------|---------------------------------|------|
| Lighting technology used:                           | LED              | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | Integrated LED's |                                 |      |
| Mains or non-mains:                                 | MLS              | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No               | Envelope:                       | -    |
| High luminance light source:                        | No               |                                 |      |
| Anti-glare shield:                                  | No               | Dimmable:                       | No   |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|


### General product parameters:

|                                                                                                                                                       |        |                        |                                                                                                                                                            |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         |        | 24                     | Energy efficiency class                                                                                                                                    | E                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |        | 2 640 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     |        | 24,0                   | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                |        | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, lighting control                                                                                      | Height | 1 512                  | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width  | 28                     |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth  | 28                     |                                                                                                                                                            |                        |

|                                                                                                                         |      |                                       |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| parts and non-lighting control parts, if any (millimetre)                                                               |      |                                       |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,440<br>0,403 |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |  |
| R9 colour rendering index value                                                                                         | 0    | Survival factor                       | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,96 |                                       |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,96 | Colour consistency in McAdam ellipses | 5              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 0,9  | Stroboscopic effect metric (SVM)      | -              |  |

(a) '-': not applicable;

(b) '-': not applicable;

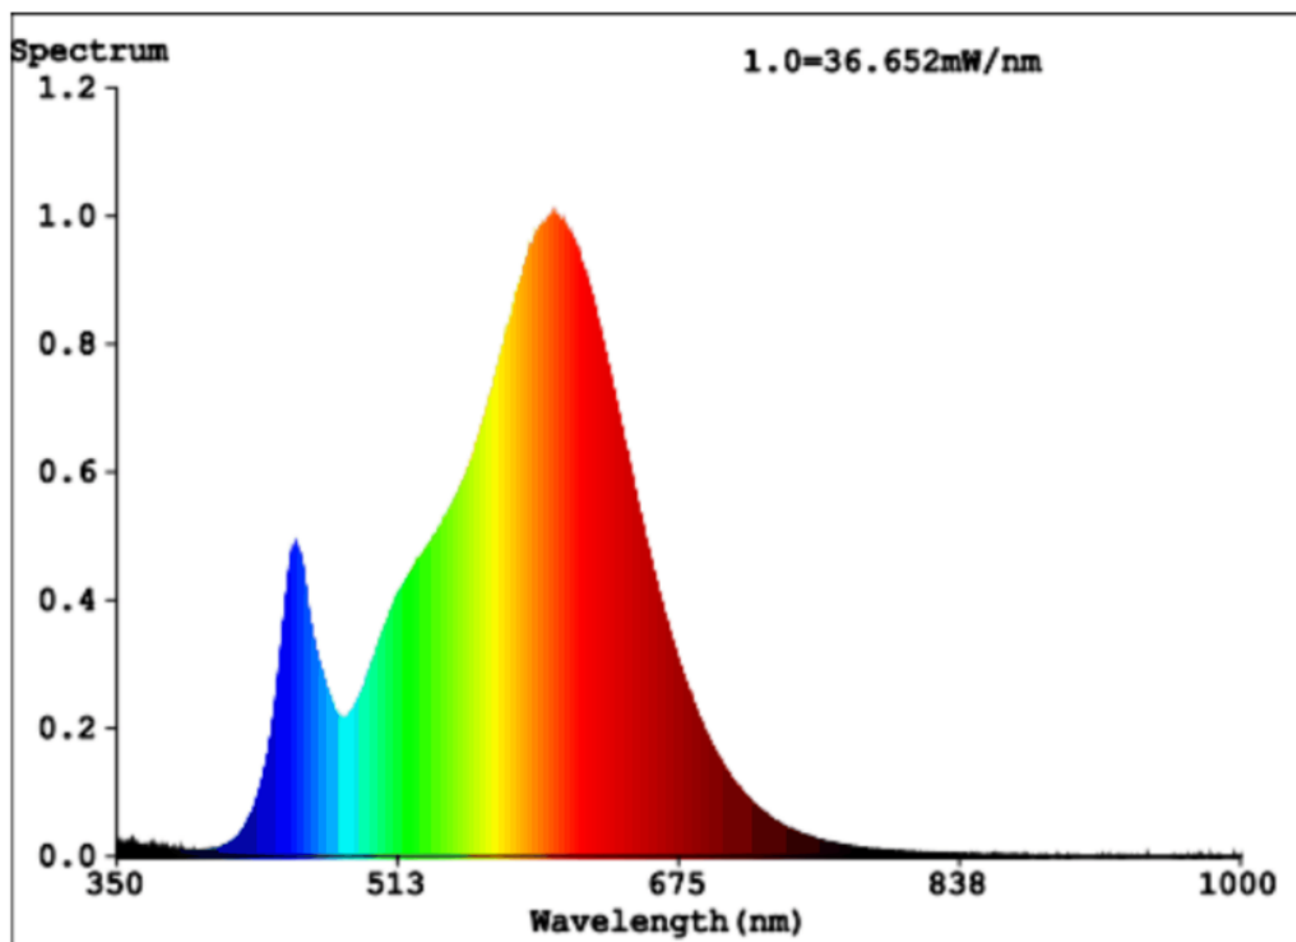

|                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>EPREL registration number:</b> 2671959</p> <p>Model placed on the Union market.</p>                                                                                                                                                                                                                                                                                  |  <p><a href="https://eprel.ec.europa.eu/qr/2671959">https://eprel.ec.europa.eu/qr/2671959</a></p> |
| <p><b>Supplier:</b> HOF Trading B.V. (Manufacturer)</p>                                                                                                                                                                                                                                                                                                                    | <p><b>Website:</b></p>                                                                                                                                                               |
| <p><b>Customer care service:</b></p> <p><b>Name:</b> HOF Trading Support</p> <p><b>Email:</b> <a href="mailto:info@hoftrading.com">info@hoftrading.com</a></p> <p><b>Address:</b><br/> Fahrenheitstraat 11<br/> 6003 DC Weert<br/> Netherlands</p> <p><b>Website:</b> <a href="http://www.hoftronic.com">www.hoftronic.com</a></p> <p><b>Phone:</b> +31 (0)85 401 0382</p> |                                                                                                                                                                                      |