

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: HOFTRONIC

Supplier's address: HOF Trading Support, Fahrenheitstraat 11, 6003 DC Weert Limburg, NL

Model identifier: 4401825

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LEDs		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	150	Energy efficiency class	C
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	21 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	150,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	73
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,379 0,378	
Parameters for directional light sources:				
Peak luminous intensity (cd)	10 970	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	-25	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,95	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	-	

(a) '-': not applicable;

(b) '-': not applicable;


Spectral Power Distribution & Chromaticity Diagram

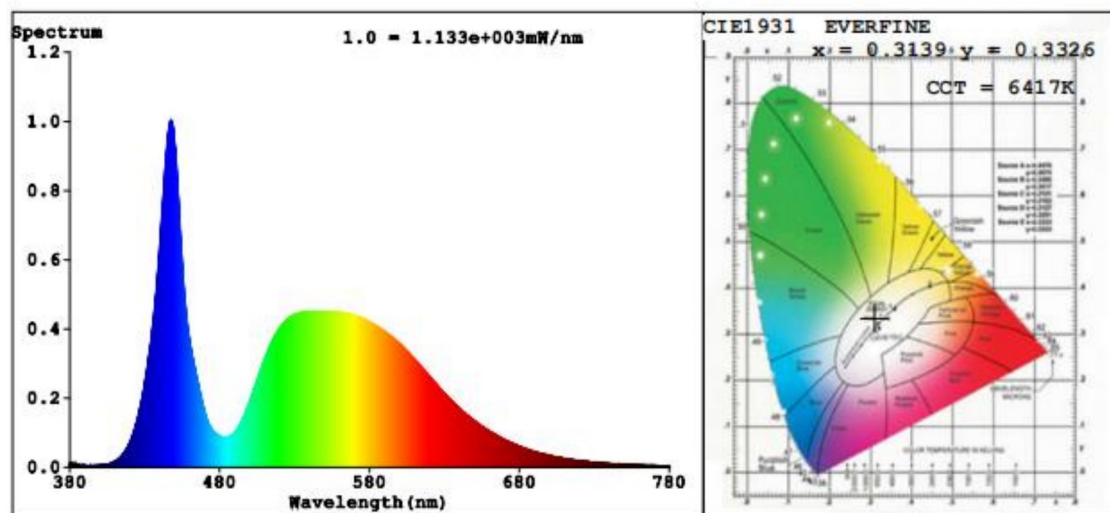

Special Color Rendering Indices

R1 = 70	R2 = 74	R3 = 77	R4 = 74	R5 = 72	R6 = 67	R7 = 80	
R8 = 61	R9 = -30	R10 = 39	R11 = 73	R12 = 43	R13 = 70	R14 = 87	R15 = 65

Model placed on the Union market from 23/10/2020



EPREL registration number: 1581738

<https://eprel.ec.europa.eu/qr/1581738>

Supplier: HOF Trading B.V. (Manufacturer)

Website:

Customer care service:

Name: HOF Trading Support

Website: www.hoftronic.com

Email: info@hoftrading.com

Phone: +31 (0)85 401 0382

Address:

Fahrenheitstraat 11
6003 DC Weert
Netherlands