

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** HOFTRONIC

**Supplier's address:** HOF Trading Support, Fahrenheitstraat 11, 6003 DC Weert Limburg, NL

**Model identifier:** 5443671

## Type of light source:

|                                                     |                 |                                 |                            |
|-----------------------------------------------------|-----------------|---------------------------------|----------------------------|
| Lighting technology used:                           | LED             | Non-directional or directional: | DLS                        |
| Light source cap-type (or other electric interface) | Integrated LEDs |                                 |                            |
| Mains or non-mains:                                 | MLS             | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No              | Envelope:                       | -                          |
| High luminance light source:                        | No              |                                 |                            |
| Anti-glare shield:                                  | Yes             | Dimmable:                       | Only with specific dimmers |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

### General product parameters:

|                                                                                                                                                       |        |                          |                                                                                                                                                            |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         |        | 4                        | Energy efficiency class                                                                                                                                    | G                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |        | 230 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2200...2700            |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     |        | 3,8                      | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | -                      |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                |        | -                        | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height | 29                       | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width  | 50                       |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth  | 29                       |                                                                                                                                                            |                        |


|                                                                                                                         |      |                                                                    |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre)                                                   |      |                                                                    |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)                                       | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)                                 | 0,461<br>0,409 |  |
| <b>Parameters for directional light sources:</b>                                                                        |      |                                                                    |                |  |
| Peak luminous intensity (cd)                                                                                            | 260  | Beam angle in degrees, or the range of beam angles that can be set | 60             |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                                                    |                |  |
| R9 colour rendering index value                                                                                         | 15   | Survival factor                                                    | 1,00           |  |
| the lumen maintenance factor                                                                                            | 0,96 |                                                                    |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                                                    |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,80 | Colour consistency in McAdam ellipses                              | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)                                  | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 0,1  | Stroboscopic effect metric (SVM)                                   | 0,4            |  |

(a) '-': not applicable;

(b) '-': not applicable;


**Test Data Sheet 8: Spectral power distribution**

**Model:** SKU 5422225 (2700K)

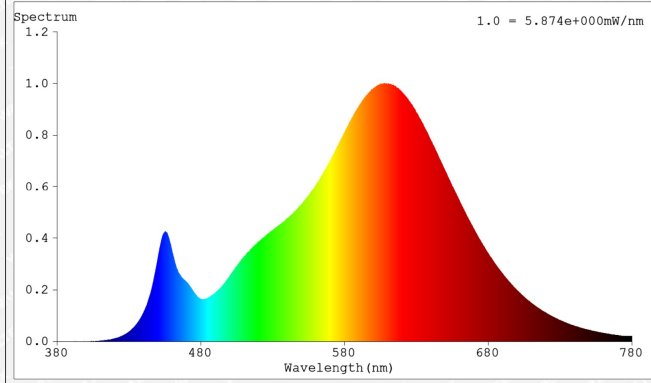

Waltek Testing Group (Foshan) Co., Ltd.  
<http://www.waltek.com.cn>

Model placed on the Union market from 08/06/2021



**EPREL registration number:** 1560203

<https://eprel.ec.europa.eu/qr/1560203>

**Supplier:** HOF Trading B.V. (Manufacturer)

**Website:**

**Customer care service:**

**Name:** HOF Trading Support

**Website:** [www.hoftronic.com](http://www.hoftronic.com)

**Email:** [info@hoftrading.com](mailto:info@hoftrading.com)

**Phone:** +31 (0)85 401 0382

**Address:**

Fahrenheitstraat 11  
6003 DC Weert  
Netherlands